




Roller ironer for on-premises laundry applications

I30-160

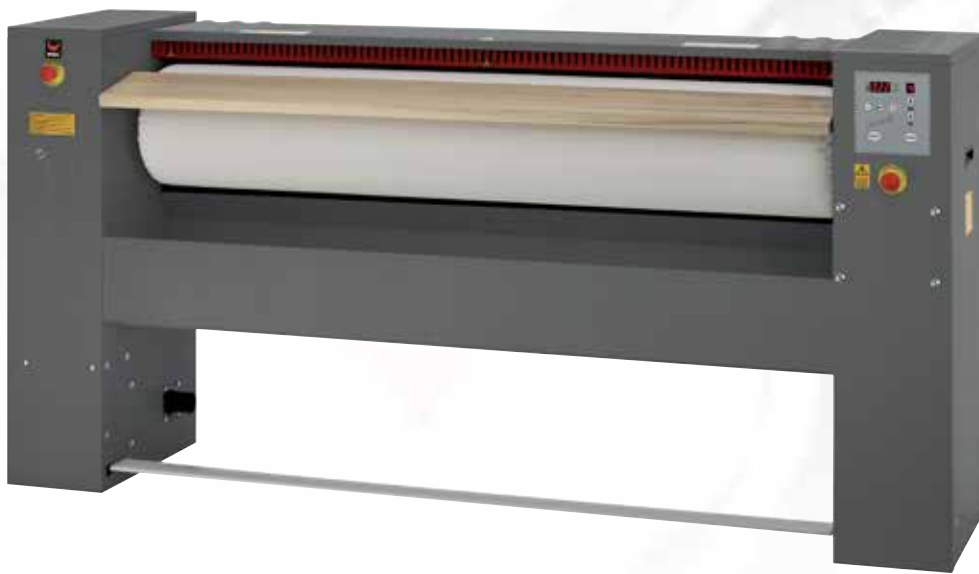

Features

- Attractive design
- Standard finger guard protection
- When unattended, the device shuts off automatically
- Reduced number of mechanical and moving parts for a lower maintenance cost
- Homogeneous ironing pressure to ensure top ironing quality
- PID controlled temperature regulation offering better temperature distribution and reduced energy consumption
- Long-life heating elements
- Anodised extruded aluminium profile avoiding temperature drop and ensuring top ironing quality

- All vital components are easily accessible
- Standard NOMEX top cover sheet
- Backside of the basin is insulated with 25mm ceramic wool
 - no energy waste
 - quick temperature rise



Options

- Frequency inverter enabling variable ironing speed
- Fan exhaust

I30-160

Roller	
Length	1600 mm
Diameter	290 mm
Speed	3,9 m/min (2-4**)
Capacity	32-50 kg/h (rest humidity 20-25%)
Fuses	
230/50/3	40 A
230/60/3	40 A
400/50/3	25 A
400/60/3	25 A
440/60/3	25 A
Heating	13,2 kW
Total power	13,7 kW (13,9 kW**)
Exhaust fan	200 m ³ /h (**)
Transport data	
Net weight	262 kg
Gross weight	300 kg
Dimensions HxWxD	1100x2200x500 mm
Volume	1,21 m ³
Packing dimensions HxWxD	1260x2280x590 mm
Volume (packed)	1,69 m ³

(**) Option AV: variable ironing speed and exhaust

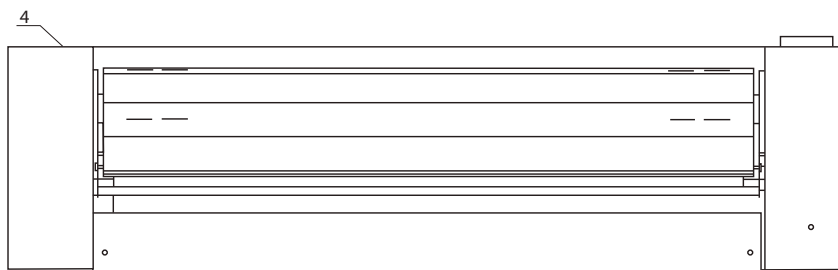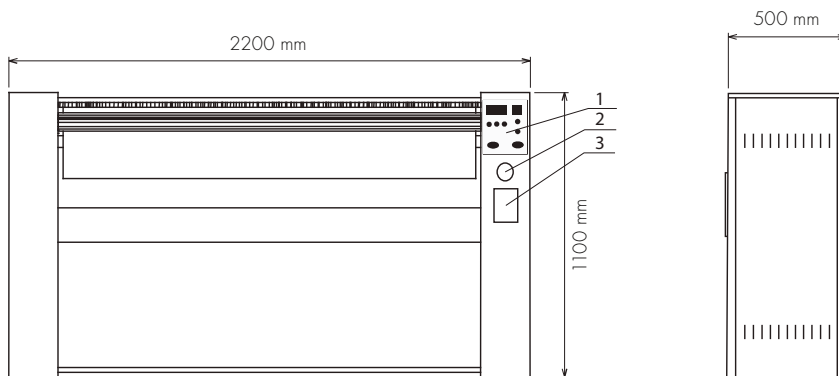

- 1 Control panel
- 2 Emergency stop button
- 3 Manual roller drive
- 4 Main switch and power supply